

MURIDEO®

THE SIX-A-8K ANALYZER

A 8K UHD & HDR
Analyzer by Murideo

In today's world of mixed systems and multiple flavors of SD, HD, UHD and now 8K! The 8K SIX-A Analyzer helps you solve manufacturing and installation issues.

Use the 8K SIX-A for testing basic and complex switching solutions for maximum capability and performance. This includes complete high bandwidth HDMI cable testing, HDBaseT and HDIP link testing up to 40 Gbps. With the ability to monitor a pesky system with intermittent issues the 8K SIX-A will capture the data required to fix the system.



Consultants will love the 8K SIX-A as a tool for system commissioning and validation and, when paired the 8K SIX-G, the 8K SIX-A Analyzer becomes the most powerful (and affordable) HDMI system troubleshooting system on the planet!

FEATURES:

- Analyze any HDMI/DVI signals up to 40Gbps (7680x4320P60)
- Test HDMI/DVI Cables up to 40Gbps, full TMDS testing
- View up to 40Gbps Video Content and Format Info
- Analyze & Report HDMI Distribution System over Time (minutes, hours, days) down to the Pixel
- Audio Confidence Tests (2-Channel & Multichannel)
- Advanced EDID Analysis & Tools
- Read, Write EDID
- Analyze HDR Signals & Metadata
- Report & Analyze InfoFrames



SIX-A Connection Diagram Testing Outputs

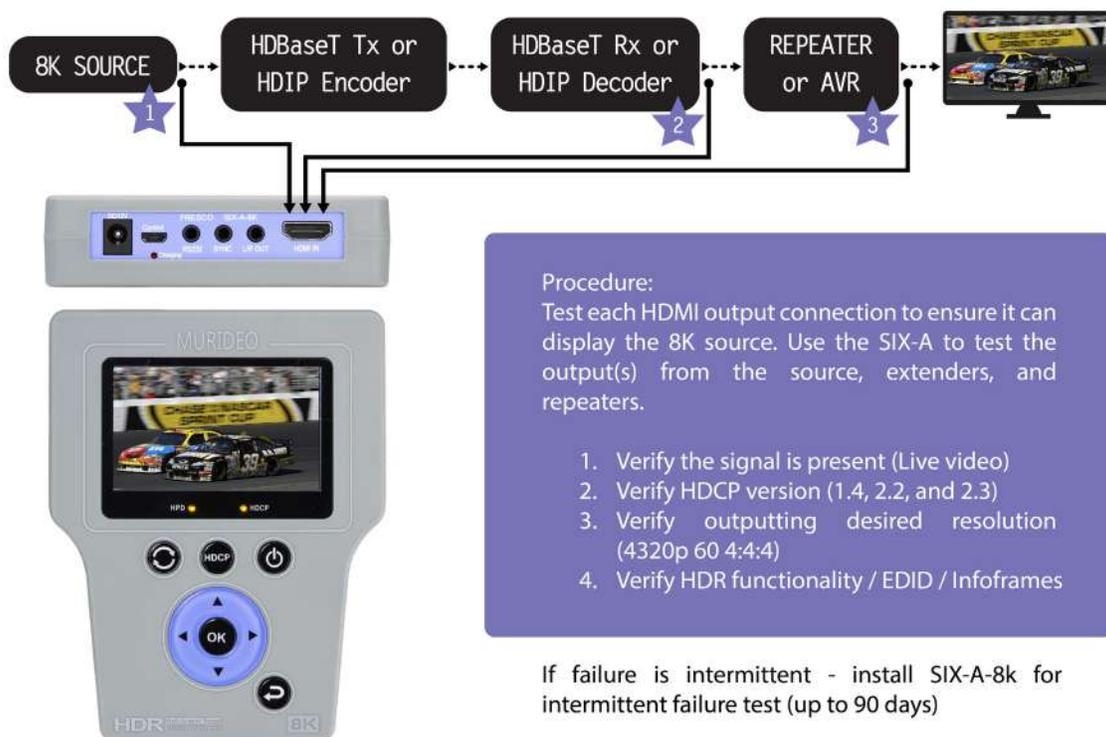

If failure is intermittent - install SIX-A-8k for intermittent failure test (up to 90 days)

MURIDEO®

THE SIX-A-8K ANALYZER

40Gbps 8K60 (4:2:0) 10 bit SUPPORT
 FULL HDR, DOLBY VISION, HDR10+ AND
 HLG SUPPORT
 40Gbps CABLE TESTING
 HDCP 2.3 ANALYSIS
 ADVANCED EDID TESTING
 BIT ERROR TESTING

PRODUCT SPECIFICATIONS:

VIDEO:	
HDMI VERSION	HDMI 2.1 (FRL5 40GBPS)
HDCP VERSION	HDCP 2.3 AND 1.4
HDCP ON/OFF	YES
MAXIMUM CLOCK RATE	600 Mcsc (594 MHz)
MAXIMUM THROUGHPUT PER CHANNEL	10.0 GBITS/SEC (40 GBP/SEC TOTAL)
RESOLUTION TIMINGS	ALL VESA; VIDEO STANDARD WITH 60, 59.94, 30, 29.97, 24, 23.98, FPS; VIDEO STANDARD WITH 50, 25 FPS; SMPTE 4K TIMINGS (4096x2160); UHD 4K TIMINGS (3840x2160)
VIDEO ENCODING	RGB, YCbCr
VIDEO SAMPLING MODELS	RGB 4:4:4, YUV 4:4:4, YUV 4:2:2, YUV 4:2:0 HDMI 2.0
COLOR BIT DEPTH	8, 10, 12, 16, AND AUTO EDID READ
AUDIO:	
AUDIO TYPE	LPCM
AUDIO SAMPLING RATE	32k, 44.1k, 48k, 88k, 96k, 176k
AUDIO SAMPLING BIT SIZE	16, 20, 24, AUTO
AUDIO CHANNELS	2
AUDIO VOLUME	YES
PORTS:	
HDMI	TYPE A
AUDIO (L/R INPUT)	3.5MM STEREO (3-CONDUCTOR)
SYNC (SYNC & LATENCY TEST)	3.5MM STEREO (3-CONDUCTOR)
RS232	3.5MM STEREO (3-CONDUCTOR)
FIRMWARE/CONTROL/	MICRO USB
ENVIRONMENTAL:	
OPERATING TEMPERATURE	23 TO 125°F (-5 TO 51°C)
STORAGE TEMPERATURE	-4 TO 140°F (-20 TO 60°C)
HUMIDITY RANGE	5-90% RH (NO CONDENSATION)
POWER:	
POWER	7.4V 2600MAH INTERNAL BATTERY OR WALL ADAPTER
POWER CONSUMPTION (TOTAL)	12 WATTS MAX
POWER SUPPLY	INPUT: AC 100-240V ~ 50/60HZ OUTPUT: DC 12V 2A
DIMENSIONS:	
DIMENSIONS (UNIT ONLY DEPTH/WIDTH/HEIGHT)	MM: 28.8 x 108.44 x 139 INCH: 1.13 x 4.27 x 5.47
WEIGHT (UNIT)	0.8 LBS/0.36 KG

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. MASS & DIMENSIONS ARE APPROXIMATE

