




P8-AD340

## QUICK SETUP GUIDE

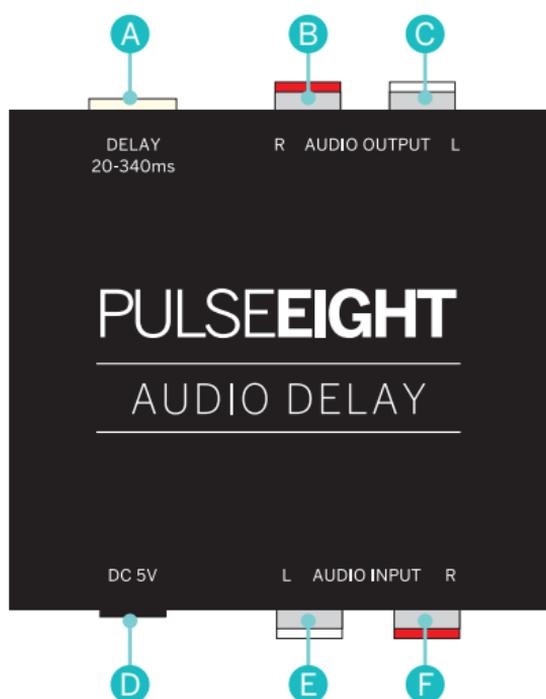

- A 16 Way Selector** Dial to select the correct setting (increments approx. 20~ milliseconds)
- B Audio Out (R)** Right output, connect to the output device (i.e amp)
- C Audio Out (L)** Left output, connect to the output device (i.e amp)
- D Power** Use the supplied mains power cable and connect to the chassis. Do not use any other power cables with this product.
- E Audio In (L)** Left input, connect to the input device (i.e audio matrix)
- F Audio In (R)** Right input, connect to the input device (i.e audio matrix)

# INITIAL SETUP

## 1 CONNECT OUTPUT DEVICE

Using the 'Audio Output' ports, connect to the input device (i.e amp)

## 2 CONNECT INPUT DEVICE

Using the 'Audio Input' ports, connect to the output device (i.e audio matrix)

## 3 CONNECT POWER

Use the supplied mains power cable and connect to the chassis. Do not use any other power cables with this product.

## 4 SELECT SETTING

Adjust position of rotary switch using flat head screwdriver to obtain correct delay. See adjacent chart for details.

Avoid turning the dial too quickly or harshly.

Setting	Delay in ms
0	21
1	43
2	64
3	85
4	107
5	128
6	149
7	171
8	192
9	213
A	235
B	256
C	277
D	299
E	320
F	341

### COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means (electronic, mechanical, magnetic, optical, chemical, manual, or otherwise) without express written permission and consent from Pulse-Eight Limited.

© Copyright 2017 Pulse-Eight Limited. All Rights Reserved.  
Version 1.0 - June 2017

### **Pulse-Eight Limited**

8-12 Alder Hills . Poole . Dorset . BH12 4AL . UK  
sales@pulse-eight.com | +44 (0)1202 413610

[www.pulse-eight.com](http://www.pulse-eight.com)